
### FT110A



1 micron can be the difference

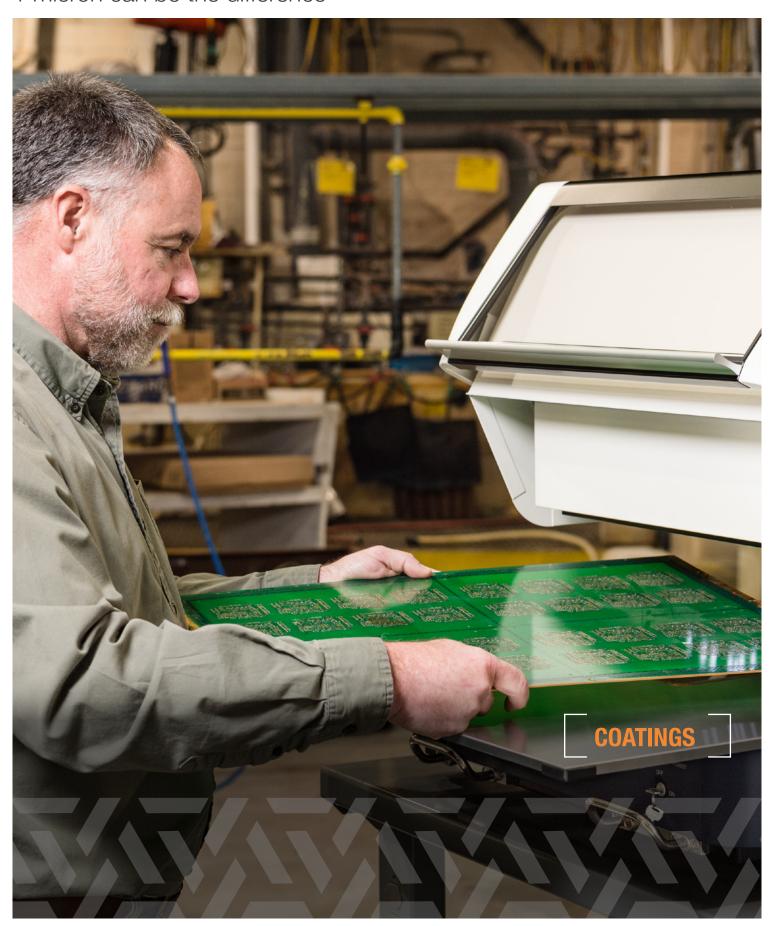

# The FT110A – Measure the miniscule

The FT110A helps a broad range of industries ensure plating specifications are met to avoid the risks of inferior performance and the costs associated with scrap or rework. In addition, it helps increase productivity by reducing the time needed to set up a series of measurements.

Accuracy and reliability are crucial in any Quality Assurance or Quality Control system, and the improved X-ray fluorescence technology inside the FT110A will support your facility in meeting the highest industry specifications.

The updated imaging system, new automatic measurement positioning functionality and a large sample table makes this benchtop coatings analyzer easy to use, increasing sample throughput.

The unit is controlled via an intuitive user interface on the Windows-based X-ray Station software. This helps to streamline your QA/QC setup through direct integration of data into Microsoft™ Word and Excel.





## Why are so many labs switching to the FT110A?



### **FAST ANALYSIS**

The powerful, high sensitivity analytical components make it possible to measure coating thickness and composition in seconds.



### **NON-DESTRUCTIVE**

X-ray fluorescence is a non-destructive process leaving no mark. It's safe for sensitive materials and the measured part doesn't need to be discarded.



### **INCREASED PRODUCTIVITY**

The automated features in the FT110A mean you can prepare and process samples faster, increasing your throughput.



### **VERSATILITY**

The FT110A can analyse up to four coating layers plus the substrate. Coatings and bulk materials such as metal alloys or bath solutions can be measured using fundamental parameters (FP) or empirical calibrations.



### **EASY TO USE**

Training is simple and anyone can operate the FT110A. Just set the sample on the stage, specify the measurement area with the user-friendly interface, and start recording readings. The user interface is configurable to show only the functions needed for daily operation.



### **COMPLIANCE**

Measurement methods meet standards ISO 3497, ASTM B568 and DIN 50987.

### Power and flexibility With a range of standard features

With a range of standard features that make gauging coating thickness quicker and easier than ever before, the FT110A can be configured to meet the most demanding of applications.



### **Features**

Multi-collimator assembly – Dual 0.1 and 0.2 mm collimators come as standard, offering flexibility to handle parts of different sizes.

Wide analytical range – Determine the thickness of coatings from titanium (22) to uranium (92).

Calibration and FP methods – Use both empirical and fundamental parameters methods to determine film thickness and composition.

Large chamber size – FT110A can accommodate parts up to 500 x 400 x 150 mm up to 10 kg.

One click measurement – Streamlined auto measurement with centre search means almost anyone can test a sample.

### **Options**


Quad-collimator assembly – Boost the versatility of the FT110A by adding 0.05 mm and 0.025  $\times$  0.4 mm collimators.


Wide-view camera – Get a bird's eye view of your sample then quickly zoom in on your selected testing area.

Auto focus function – Thick or thin, large or small, the FT110A will automatically focus on the sample within seconds. Measure samples from a distance of up to 80 mm (3.1"), ideal for parts with recessed areas or for measuring multiple samples with different heights.

Image processing software – Quickly prepare complex samples for analysis using the pattern recognition software. The operator simply brings the measurement area into view and the software automatically makes fine adjustments.

For over 45 years, Hitachi High-Tech has pioneered the use of X-ray fluorescence technology and has developed a full range of analytical instruments.

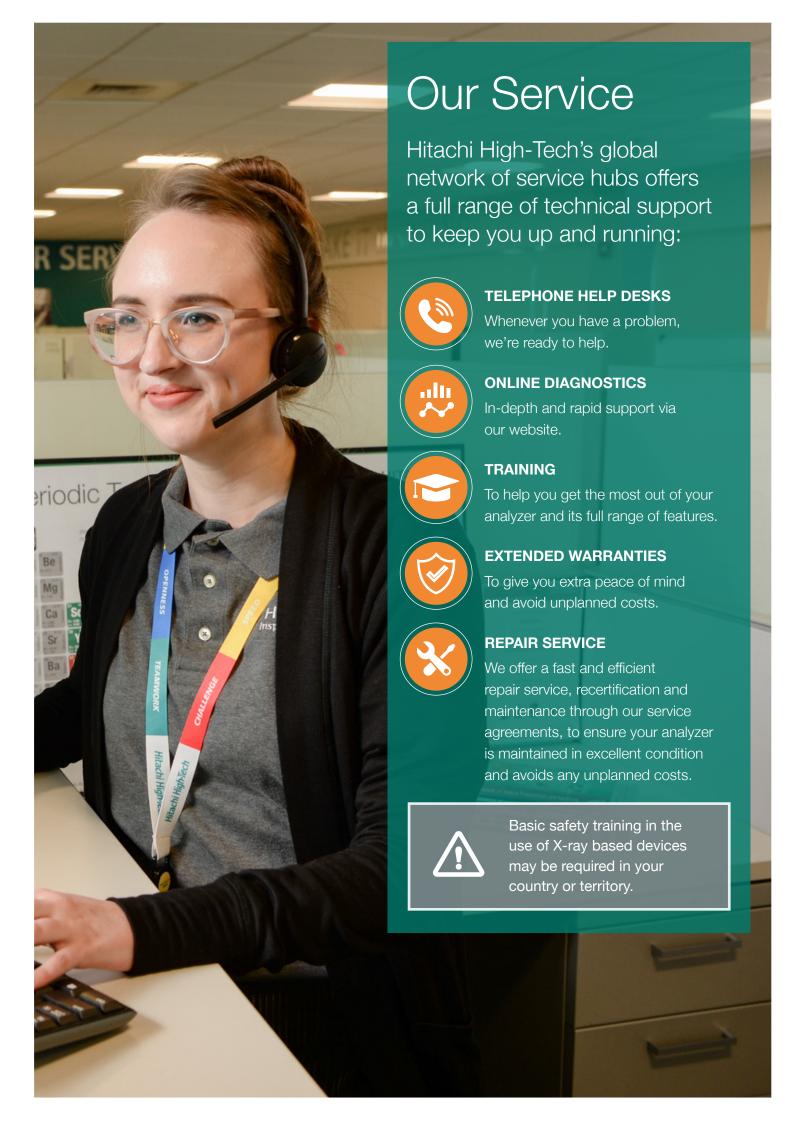

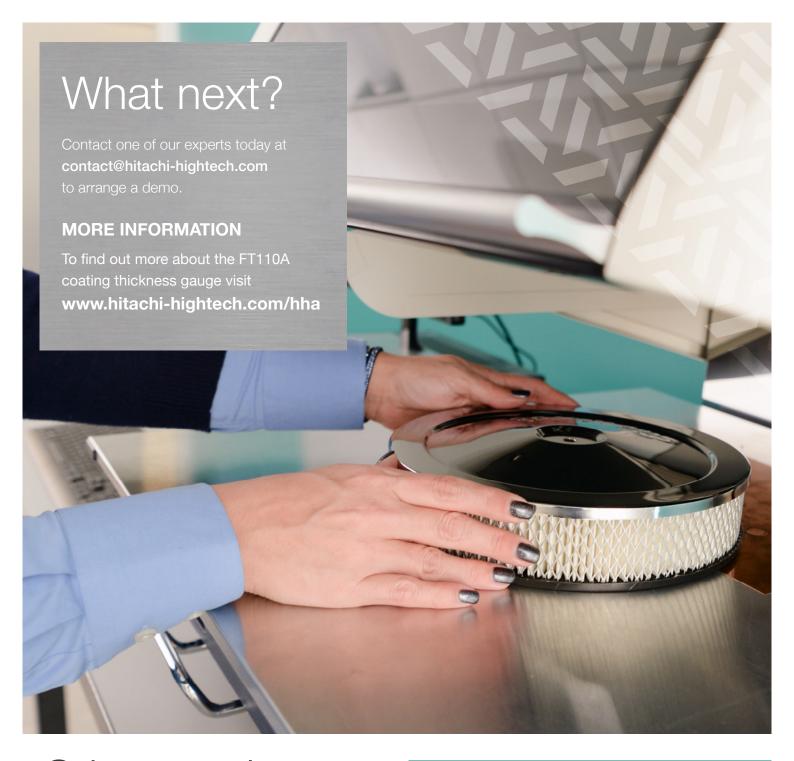

### Other products

We have been providing industrial analysis products for the coatings market for over 45 years.

- **RoHS Screening:** dedicated solutions for RoHS contaminants including phthalates.
- Handheld XRF: for portable coatings analysis of parts too large or heavy to fit in a benchtop system.
- **Electromagnetic gauges:** for rapid thickness measurement of PCB copper, paint, anodising, electroplating and galvanising.

### 

This publication is the copyright of Hitachi High-Tech Analytical Science Ltd and provides outline information only, which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or regarded as the representation relating to the products or services concerned. Hitachi High-Tech Analytical Science Ltd's policy is one of continued improvement. The company reserves the right to alter, without notice the specification, design or conditions of supply of any product or service.

Hitachi High-Tech Analytical Science Ltd acknowledges all trademarks and registrations.

© Hitachi High-Tech Analytical Science, 2020. All rights reserved.

Part number: 10017341



